


INTEL Whitley 4-GPU Server

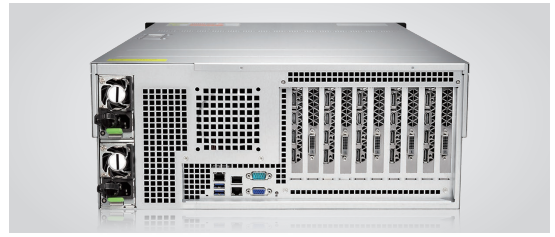

AS4104G-D12R-G3

Front hard drive	Up to 12x 3.5" /2.5" SAS/SATA hot-swap hard drives
Rear hard drive	N/A
Processor	Supports 1/2 3rd Generation Intel® Xeon® Scalable series processors with a maximum TDP of 205W
Chipset	Intel® C621A series server-specific chipset
GPU	Supports 4 RTX4090 and RTX3090 double-width, full-length and full-height cards
Memory	16 DDR4 memory slots Support DDR4 2666/2933/3200 MHz LRDIMM/RDIMM memory
Storage controllers	1 M.2 (PCIe 3.0 x 4) interface, 3 MiniSAS HD interface, 2 SATA DOM interface
Driver	12 hot-swap SAS/SATA (HDD/SSD)
Power	2600W hot-swappable redundant power supply
External port & PCIe	<p>External Ports Front: 2 USB 3.0 Rear: 1 VGA, 1 COM port, 2 USB 3.0, 1 management network port, 2 RJ45 network ports</p> <p>PCIe Expansion 10 PCIe slots, supporting 4 double-width, full-length, and full-height 4090 graphics cards: Supports 6 PCIe 3.0 x8 (in a PCIe x16 slot), 1 PCIe 3.0 x16, and 3 PCIe 4.0 x16. Optional 4 PCIe 3.0 x8 (in a PCIe x16 slot), 2 PCIe 3.0 x16, and 3 PCIe 4.0 x16.</p>
Intelligent temp. control	Supports
Fan	Standard 8 hot-swappable N+1 redundant fans (8038). Optional rear support for 2 temperature-controlled 8038 fans
Network	Onboard 2 Gigabit RJ45 network ports
Security	Supports TPM module
Management	1 dedicated RJ45 management port
OS	Microsoft Windows Server、Red Hat Enterprise Linux、SUSE Linux Enterprise Server、CentOS、Ubuntu
Virtualization	Citrix Xen Server、Vmware ESXi、Linux KVM、Windows Hyper-V
Certification	CCC、CE、FCC、ROHS
Size	695mm x 433mm x 176.5mm (D x W x H)
Temperature	Operating temperature: 5°C - 35°C (indoor) Storage temperature: -40°C - 70°C
Humidity	Operating humidity: 20% - 80% (non-condensing) Storage humidity: 20% - 90% (non-condensing)

Please note that the above specifications are subject to change without prior notice. (Gooxi reserves the right for the final interpretation)